

Casing: High shock capacity ductile (nodular) iron. Consult lmo for steel case availability.

Rotor Housing: Pearlitic gray iron for rotor sizes 106 through 187; bronze sizes 218 and larger.

Power Rotor: Alloy steel, nitride hardened and thread ground.

Idler Rotors: Pearlitic gray iron, induction hardened and thread ground for sizes 106 through 187; alloy steel, nitride hardened and thread ground sizes 218 and larger.

Gaskets: Cellulose and non-asbestos fiber.

Seal & Bearing: Type B: Buna N bellows mechanical seal, Buna N O-rings and standard external, permanently greased packed, deep groove ball bearing - recommended for distillate fuels and lubricating oil or hydraulic fluids.

Type H: Positive drive mechanical seal, fluorocarbon O-rings and external high temperature, permanently greased packed, deep groove ball bearing.

Accessories: Completely mounted, built to order pump/driver assemblies are available with baseplates, ANSI RF spool pieces, NEMA "C" face adapters.

Outlet Pressure: 1500 PSIG (103 BAR) maximum for lube, seal and hydraulic oils. 1000 PSIG (70 BAR) maximum for distillate & residual fuels and crude oils. Minimum recommended differential pressure is 40 PSI (2.8 BAR) when viscosity is >100 ssu and 25 PSI (1.7 BAR) when viscosity is <100 ssu.

Inlet Pressure: Type B & H: 75 PSIG (5 BAR) maximum, sizes 106 - 187
50 PSIG (3 BAR) maximum, sizes 218 - 400

Viscosity: 33 ssu (2.0 CST) minimum: Type B - 3000 ssu (650 CST) maximum (consider cold start)
Type H - Viscosities above 3000 ssu (650 CST)

Temperature: Type B: 0 to 180°F
Type H: Sizes 106 - 187 0 to 225°F (-18 to 107°C)
Sizes 218 and up 0 to 200°F (-18 to 93°C)

Speed: Do not exceed 1800 RPM when pumping residual fuels or crude oil due to the presence of abrasives and contaminants.

Drive: Direct only. (no shaft side loading)

Rotation: Clockwise facing pump shaft

Mounting: May be foot mounted in any orientation. Flange mounting optional for certain applications.


Filtration: Inlet strainers are required to keep contaminants and abrasives out of the pump. They must be selected in consultation with the strainer vendor to prevent pump starvation. Normally, 60 mesh (0.01 inch - 238 micron) for light and 1/8 - 3/16 inch (3 - 5mm) openings for heavy oils are recommended.



4 to 400 GPM (16 to 1514 L/M) Pressure to 1500 PSIG (103 BAR)

Series 6D Imo pumps are intended for relatively high pressure service on petroleum or similar viscosity liquids. Typical applications include crude oil pipeline service, fuel atomization for burning in a steam boiler, fuel injection for combustion gas turbines, fluid power service on hydraulically operated machinery, gas sealing in centrifugal compressors and hydrostatic bearing support.

These pumps are hydraulically balanced in both the axial and radial directions which eliminates bearing loads due to discharge pressure. The single bearing is external to the liquid pumped and does not rely on the lubricating qualities of the pumped liquid. The single mechanical seal is exposed only to inlet pressure. Very low airborne noise levels are normal for Imo three screw positive displacement pumps as are high operating efficiencies and non-pulsating delivery of flow.

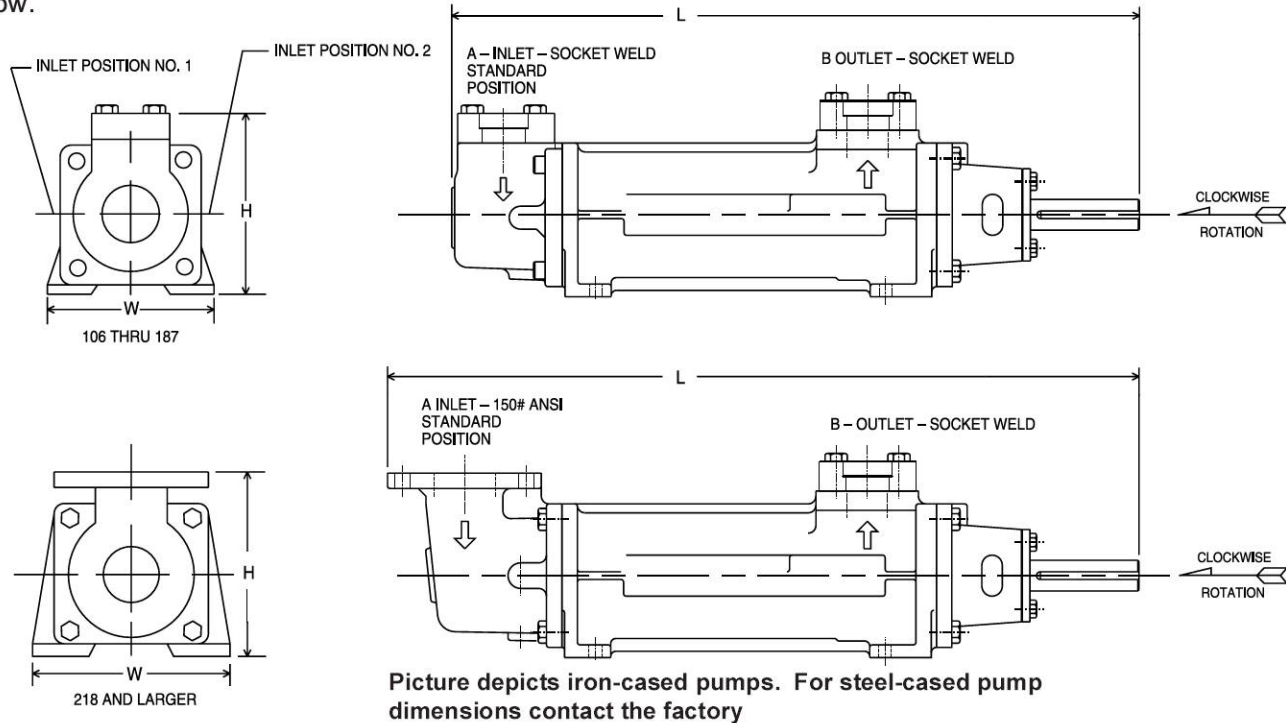

Picture depicts iron-cased pumps. For steel-cased pump dimensions contact the factory

SIZE	A		B		H		L		W		WEIGHT	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	LBS.	KG
106	1	25.4	1	25.4	6.8	172	18.4	468	6	153	49	22.2
118	1-1/2	38.1	1	25.4	7	189	19.6	498	6.3	161	57	25.9
137	1-1/2	38.1	1	25.4	7.3	185	21.7	552	6.5	166	71	32.2
156	2	50.8	1-1/2	38.1	7.8	197	24.2	615	7	178	83	37.7
187	2	50.8	1-1/2	38.1	8.3	210	26.5	674	7.5	191	117	53
218	2-1/2	63.5	2	50.8	9	244	36.5	928	9	228	204	93
250	3	76.2	2-1/2	63.5	10.75	280	39.9	1014	10	254	309	140
275	3	76.2	3	76.2	11.12	313	42	1067	11	280	350	159
312	4	101.6	3	76.2	11.75	331	46	1169	12	305	392	177
350	5	127	4	101.6	13.25	412	50.4	1281	13	331	510	231
400	6	152.4	4	101.6	16	432	55	1397	14	356	845	383